

GFR Series - 1 Pole+N, C Trip, 10 mA

277V AC Ground Fault Relay

with Overload Protection (RCBO)

The GFR Series is a combined Equipment Ground Fault Relay and Supplementary Protector (RCBO), featuring dual pole switching (live and neutral) and designed to provide protection against overloads and AC ground faults (residual current faults) as well as pulsating DC ground faults.



Ordering Information


Rated Current	Type/ Cat. No.	Rated Voltage
5.0A	GFR2C05010	277V AC
6.0A	GFR2C06010	277V AC
8.0A	GFR2C08010	277V AC
10A	GFR2C10010	277V AC
12A	GFR2C12010	277V AC
13A	GFR2C13010	277V AC
15A	GFR2C15010	277V AC
16A	GFR2C16010	277V AC
20A	GFR2C20010	277V AC
25A	GFR2C25010	277V AC

UL 1077
Ground Fault Relay
with Overload Protection

Technical Specification

Number of Poles	1+N
Voltage Rating (maximum)	277V AC
Ground Fault Sensitivity Level	10 mA
Short Circuit Withstand Rating	10 kA
Rated Frequency	50/60Hz
Trip Characteristic	C
Cable Size & Tightening Torque	Stranded Wire: 16 - 3 AWG (1.5 mm ² - 25 mm ²) @ 17.5 lb-in (2.0 Nm) Solid Wire: 16 - 10 AWG (1.5 mm ² - 5.5 mm ²) @ 17.5 lb-in (2.0 Nm) 18 - 16 AWG (1 mm ² - 1.5 mm ²) @ 25 lb-in (2.8 Nm)
Electrical Life	6000 Switching Operations
Mechanical Life	10000 Switching Operations

Dimensions
(to convert to inches multiply by 0.03937)

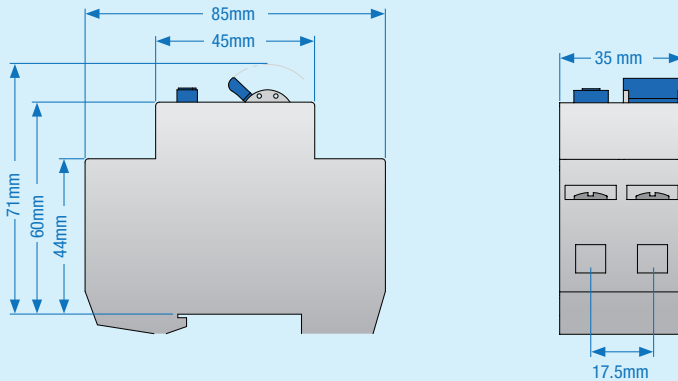


Weight 217 g


GFR Series RCBO Short Circuit Withstand Rating

V	I	IR	Backup
1+N Pole	≤20A	10kA	None
277V AC	>20A	10kA	Class J Fuse 250A or lower Altech L Series Branch Circuit Breaker Altech R Series Supplementary Protector


GFL Series RCBO Overload Trip Curves

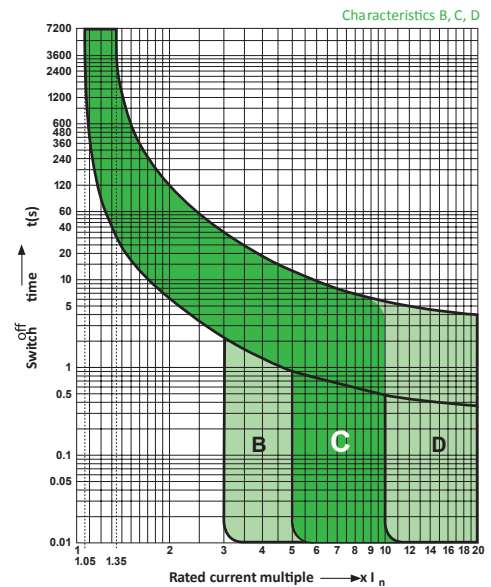


GFR Series RCBO Ground Fault Trip Curve

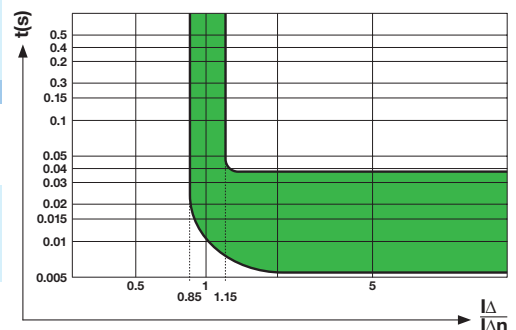


GFR Series - 1 Pole+N, C Trip, 10 mA
 Applicable voltage systems and wiring examples.

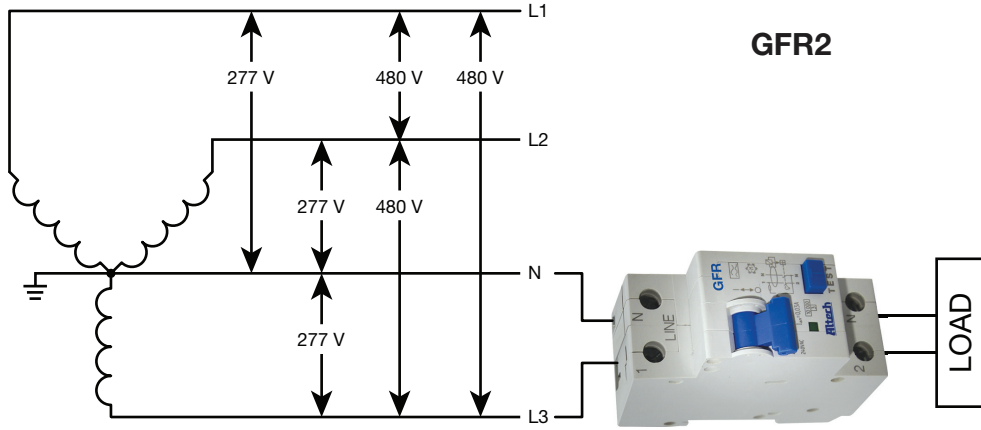


GFR2

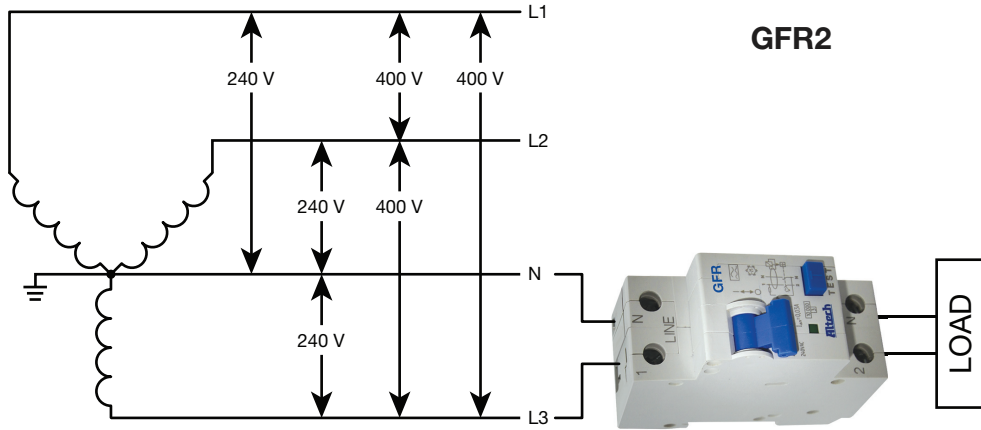

GFR2

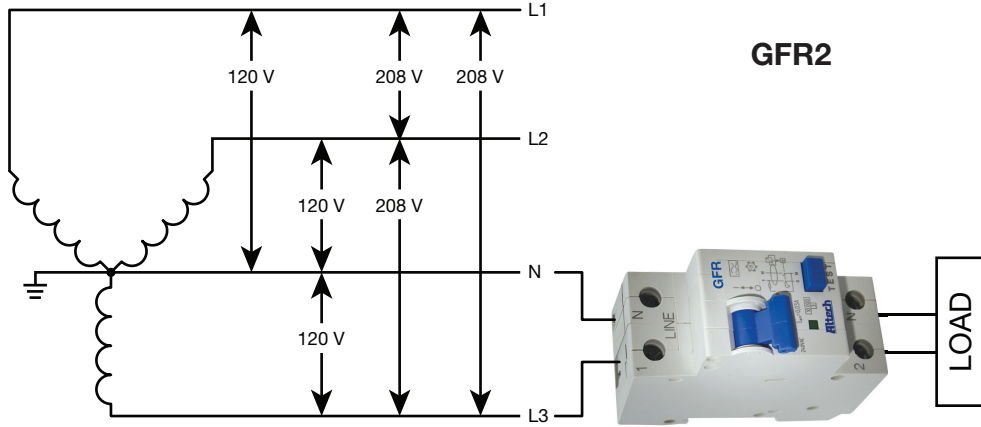

GFR2

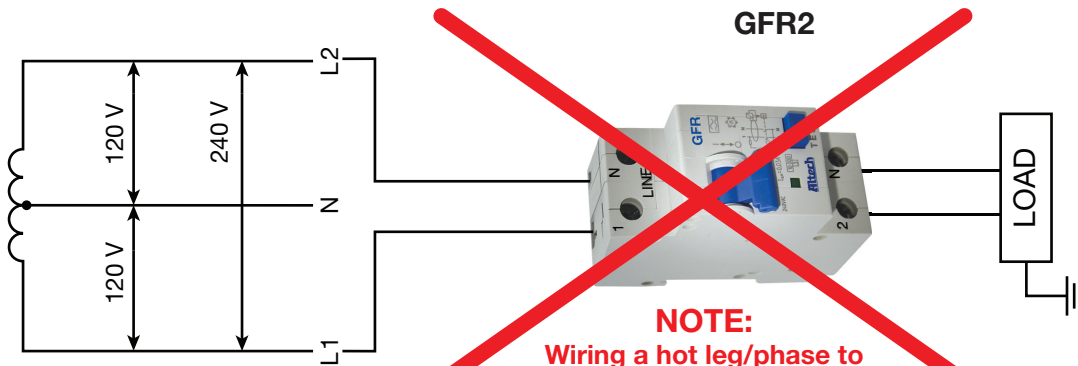

GFR2

NOTE:
 Wiring a hot leg/phase to
 N terminal is not permitted.

UL 1077
 Ground Fault Relay
 with Overload Protection