




4 POLE Standard Pack 3



Rated Current (In)	Type/ Cat. No.	Approvals
1.0A	4B1UM	UL, SF
1.6A	4B1.6UM	UL, SF
2.0A	4B2UM	UL, SF
2.5A	4B2.5UM	UL, SF
3.0A	4B3UM	UL, SF
3.5A	4B3.5UM	UL, SF
4.0A	4B4UM	UL, SF
5.0A	4B5UM	UL, SF
6.0A	4B6UM	UL, SF, DVE
10A	4B10UM	UL, SF, DVE
13A	4B13UM	UL, SF, DVE
15A	4B15UM	UL, SF
16A	4B16UM	UL, SF, DVE
20A	4B20UM	UL, SF, DVE
25A	4B25UM	UL, SF, DVE
30A	4B30UM	UL, SF
32A	4B32UM	UL, SF
40A	4B40UM	UL, SF
50A	4B50UM	UL, SF
60A	4B60UM	UL, SF
63A	4B63UM	UL, SF

Weight (per piece)

0.3A - 32A:	33A - 63A:
0.480 - 0.564 kg	0.548 - 0.632kg
1.058 - 1.243 lb	1.208 - 1.393 lb

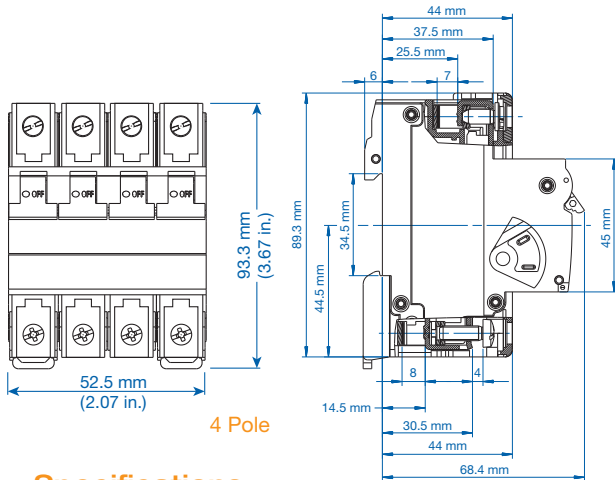

Specifications

Voltage Rating	480Y/277V AC 0.3-25A: 1 pole - 42V DC; 2 Pole - 80V DC 30-60A: 1 pole - 24V DC; 2 Pole - 60V DC
Short Circuit Withstand Rating (UL/CSA - Ratings)	0.3-60A (RC): 10kA with UL-listed RK5 back-up fuse or MCCB
Group Short Circuit Withstand Rating (UL/CSA - Ratings)	0.3-10A (RC): 10kA; 13-60A (RC): 5kA no branch circuit protection required
Interrupting Capacity (VDE - Ratings)	0.3-63A (RC): 10kA
Calibration Temperature	40°C (104°F)
Operating Temperature	-25°C to 70°C (-13°F to 158°F)
Storage Temperature	-40°C to 70°C (-40°F to 158°F)
Terminal Size Acceptability	Top: 18-3 AWG; Bottom: 18-2 AWG
Terminal Torque	2 Nm (17.7 lb.in.) / 2.5 Nm (22.2 lb.in.)
Vibration Resistance	> 15g according to DIN EN 60069-2-59 during a load with 1.05 x In
Resistance to mechanical shocks	25g @ 11ms
Terminal Protection Degree	IP20
Mounting Orientation	In any plane


Short Circuit Withstand Ratings for DSL8 Manual Motor Controller

Trip Curve	Amp Range	UL-Listed RK5-Fuse up to 10kA	Backup Protection UL-Listed MCCB up to 10kA	No BCP Required up to:
all	0.3 - 10A	4xRC* min 15A, max 70A	4xRC* min 15A, max 70A	10kA
all	12 - 30/32A	4xRC* max 125A	4xRC* max 125A	5kA
all	40 - 50A	4xRC* max 200A	4xRC* max 200A	5kA
all	60 / 63A	4xRC* max 250A	4xRC* max 250A	5kA

*up to nearest rated current

B Trip Characteristic

In = 1A - 10A rated current

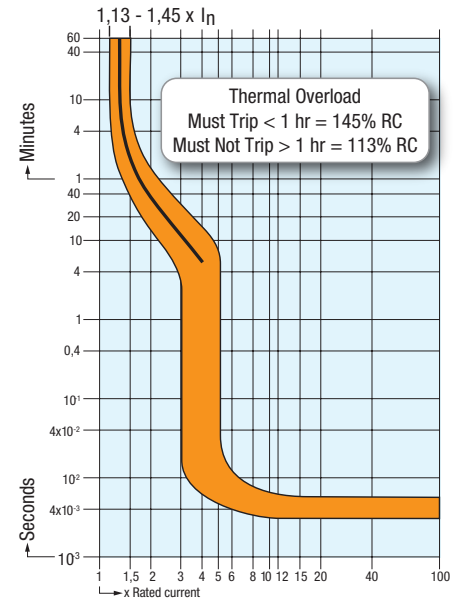

B Trip Characteristic

In = 13A - 60A rated current

