




2 POLE Standard Pack 6



Rated Current (I _N)	Type/ Cat. No.
0.3A	2C03UL
0.5A	2C05UL
1.0A	2C1UL
1.6A	2C1.6UL
2.0A	2C2UL
3.0A	2C3UL
4.0A	2C4UL
5.0A	2C5UL
6.0A	2C6UL
8.0A	2C8UL
10A	2C10UL
12A	2C12UL
13A	2C13UL
15A	2C15UL
16A	2C16UL
20A	2C20UL
25A	2C25UL
30A	2C30UL
32A	2C32UL
40A	2C40UL
50A	2C50UL
60A	2C60UL
63A	2C63UL

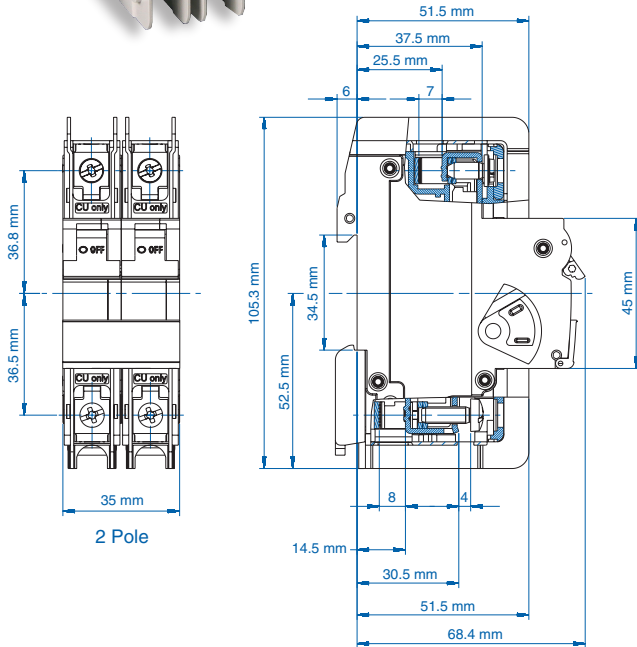


Weight (per piece)

0.3A - 32A:
 0.272 - 0.286 kg
 0.600 - 0.631 lb

33A - 63A:
 0.284 - 0.326 kg
 0.626 - 0.718 lb


C Trip Characteristic

I_N = 0.3A - 10A rated current

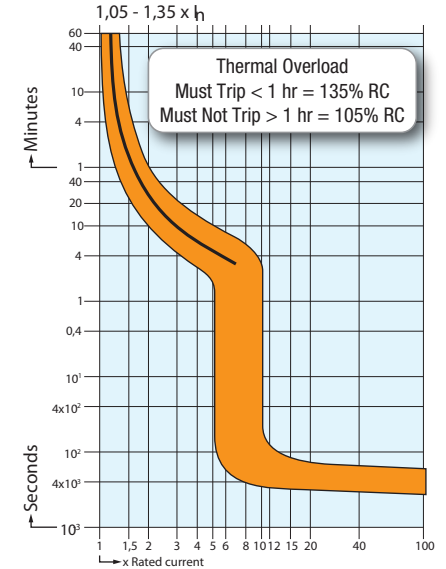

C Trip Characteristic

I_N = 12A - 63A rated current

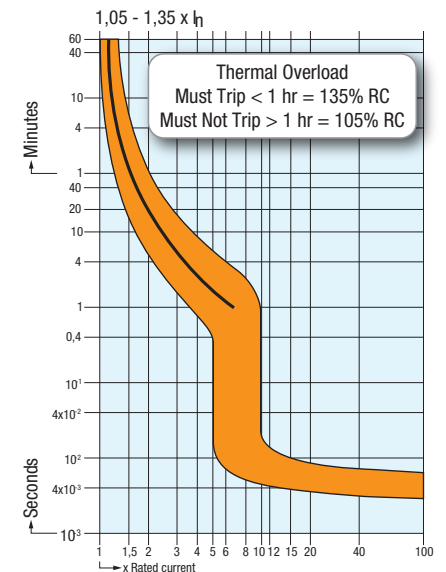

Specifications

Current/ Voltage Rating	0.3 - 63A/240V AC, 0.3-32A/480Y/277V AC
Calibration Temperature	40°C (104°F)
Ambient Temperature	-25°C to +70°C (-13°F to 158°F)
Storage Temperature	-40°C to +70°C (-40°F to 158°F)
Terminal Size Acceptability	Top: 18-3 AWG; Bottom: 18-2 AWG
Terminal Torque (min/max)	2 Nm (17.7 lb.in.) / 2.5Nm (22.2 lb.in)
Electrical Life	6,000 switching cycles ON/ OFF
Mechanical Life	10,000 switching cycles ON/ OFF
Vibration Resistance	> 15g according to DIN EN 60069-2-59 during a load with I ₁ = 1.05 x I _N
Resistance to mechanical shocks	25g @ 11ms
Degree of protection acc. IEC/EN 60529	IP20
Mounting Orientation	In any plane

Short Circuit Interrupting Capacity

Pole	Type	0.3-32A	40-63A
2	AC	10kA @ 240, 480Y/277V	10kA @ 240V