

**FEATURES**

- 6 Digit, 7 Segment LED Counter,
- Compact Size
- Inbuilt Sensor Supply



**CAT. NO.**


**XC410**

<b>Display</b>	
Display Type	7 Segment LED Display
Digits	1 row of 6 digits
<b>Supply Specification</b>	
Input Voltage	90-270V AC/DC (50/60Hz)
<b>Input Specification</b>	
Input Measurement	NPN/PNP
Input Type	Voltage Pulse (3-30V DC) from proximity, switches, encoders, solid state devices, potential free contact
Input Speed	A) 0-20Hz B) 0-1kHz
Reset	Front, Remote
<b>Output Specification</b>	
Sensor Supply	Inbuilt, 12V DC, 30mA
<b>Functional Specification</b>	
Range	999999 counts
Time Ranges	-
Counting Direction	Up
Memory	Yes
Configuration Lock	-
Power Consumption	5VA max
<b>Accuracy</b>	
Rate	-
<b>Environmental Specification</b>	
Operating Temperature	0 to 50°C (32 to 122°F)
Storage Temperature	-20 to 75°C (-4 to 167°F)
Humidity (Non-Condensing)	95% Relative Humidity
Weight	110 grams (.242 lbs)

**Ordering Information**

<b>Part No.</b>	<b>Supply Voltage</b>	CE	RoHS	UL US
XC410-CU	90-270V AC/DC	●	●	●

**DIMENSIONS**

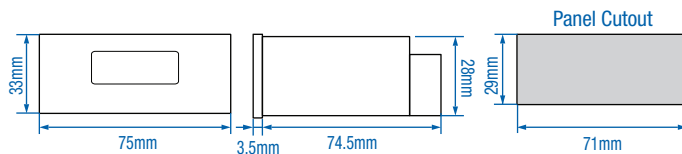

**TERMINAL CONNECTIONS**

