

# Multifunction Digital Timer Panel Mount

## FEATURES

- Multifunction - 7 Timing Functions
- 9 Time Ranges, Seconds/Minutes/Hours
- Dual Display, 4 Digit, 7 segment LED
- 2 Setpoints



cULus CE  
E253771

## CAT. NO.


**XT5042**

<b>Display</b>	
Display Type	7 Segment LED Display
Digits	2 row of 4 digits
LED Indication	LED 1: Relay 1, LED 2: Relay 2, LED 3: Sec., LED 4: Min., LED 5: Hrs.
<b>Supply Specification</b>	
Input Voltage	85-270V AC/DC (50/60Hz)
<b>Input Specification</b>	
Start Input	Gate / Pulse start (programmable)
Reset	Front, remote, power interruption (programmable)
<b>Output Specification</b>	
Main Output	2 SPST - 2NO - 5 @ 230V AC
<b>Functional Specification</b>	
Modes	ON delay / Interval / Cyclic ON first / Cyclic OFF first / Forward-pause-reverse / Instantaneous+delayed batch
Time Ranges	0-99.99 sec / 0-999.9 sec/min/hr / 0-9999 sec/min/hr / 0-99:59 min: sec / 0-99:59 hr:min
Counting Direction	Up/Down
Memory	10 years
Power Consumption	5VA max
Set Point	2
<b>Accuracy</b>	
Timer	+/- .05% of Full Scale or 50m sec.
<b>Environmental Specification</b>	
Operating Temperature	0 to 50°C (32 to 122°F)
Storage Temperature	-20 to 75°C (-4 to 167°F)
Humidity (Non-Condensing)	95% Relative Humidity
Weight	175 grams (.385 lbs)
Protection Level	IP65 (for faceplate)


## Ordering Information

<b>Part No.</b>	<b>Supply Voltage</b>	CE	RoHS	cULus
XT5042-CU	85 to 270V AC/DC	●	●	●

## DIMENSIONS

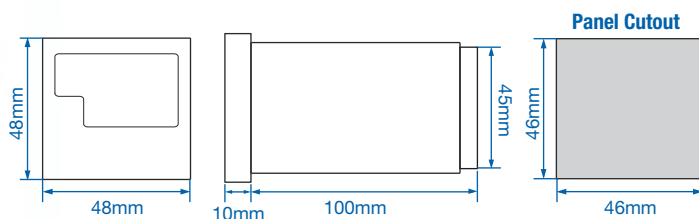

## TERMINAL CONNECTIONS



See pages 42-43 for timing diagrams.