

# GFR Series - 1 Pole+N, D Trip, 10 mA

## 277V AC Ground Fault Relay

### with Overload Protection (RCBO)

The GFR Series is a combined Equipment Ground Fault Relay and Supplementary Protector (RCBO), featuring dual pole switching (live and neutral) and designed to provide protection against overloads and AC ground faults (residual current faults) as well as pulsating DC ground faults. Short Circuit Withstand rating is 10kA.



### Ordering Information


Rated Current	Type/ Cat. No.	Rated Voltage
5.0A	GFR2D05010	277V AC
6.0A	GFR2D06010	277V AC
8.0A	GFR2D08010	277V AC
10A	GFR2D10010	277V AC
12A	GFR2D12010	277V AC
13A	GFR2D13010	277V AC
15A	GFR2D15010	277V AC
16A	GFR2D16010	277V AC
20A	GFR2D20010	277V AC
25A	GFR2D25010	277V AC

**UL 1077**  
Ground Fault Relay  
with Overload Protection

### Technical Specification

Number of Poles	1+N
Voltage Rating (maximum)	277V AC
Ground Fault Sensitivity Level	10 mA
Short Circuit Withstand Rating	30 kA
Rated Frequency	50/60Hz
Trip Characteristic	D
Cable Size & Tightening Torque	Stranded Wire: 16 - 3 AWG (1.5 mm <sup>2</sup> - 25 mm <sup>2</sup> ) @ 17.5 lb-in (2.0 Nm) Solid Wire: 16 - 10 AWG (1.5 mm <sup>2</sup> - 5.5 mm <sup>2</sup> ) @ 17.5 lb-in (2.0 Nm) 18 - 16 AWG (1 mm <sup>2</sup> - 1.5 mm <sup>2</sup> ) @ 25 lb-in (2.8 Nm)
Electrical Life	6000 Switching Operations
Mechanical Life	10000 Switching Operations

**Dimensions**  
(to convert to inches multiply by 0.03937)

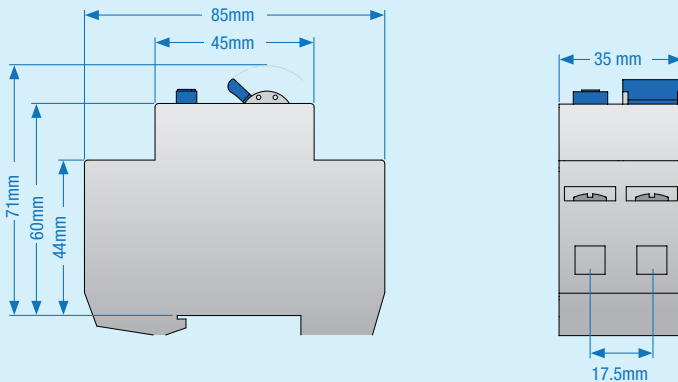


**Weight** 217 g


### GFR Series RCBO Short Circuit Withstand Rating

V	I	IR	Backup
1+N Pole	≤20A	10kA	None
277V AC	>20A	10kA	Class J Fuse 250A or lower Altech L Series Branch Circuit Breaker Altech R Series Supplementary Protector





### GFL Series RCBO Overload Trip Curves

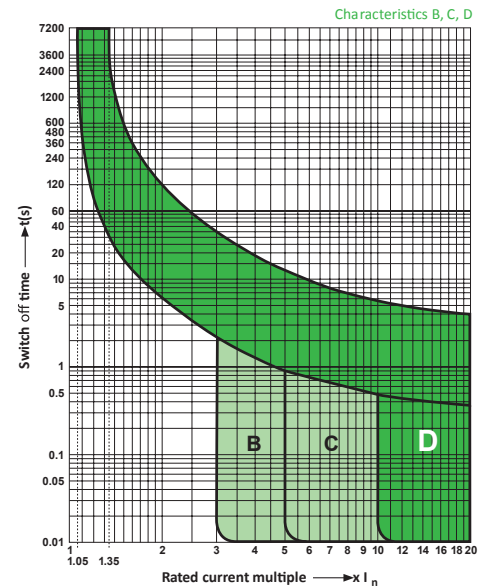

### GFR Series RCBO Ground Fault Trip Curve

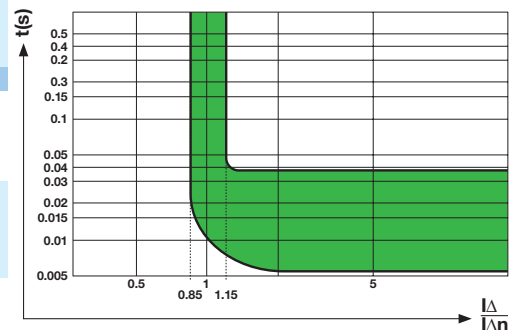

GFR Series - 1 Pole+N, D Trip, 10 mA  
 Applicable voltage systems and wiring examples.

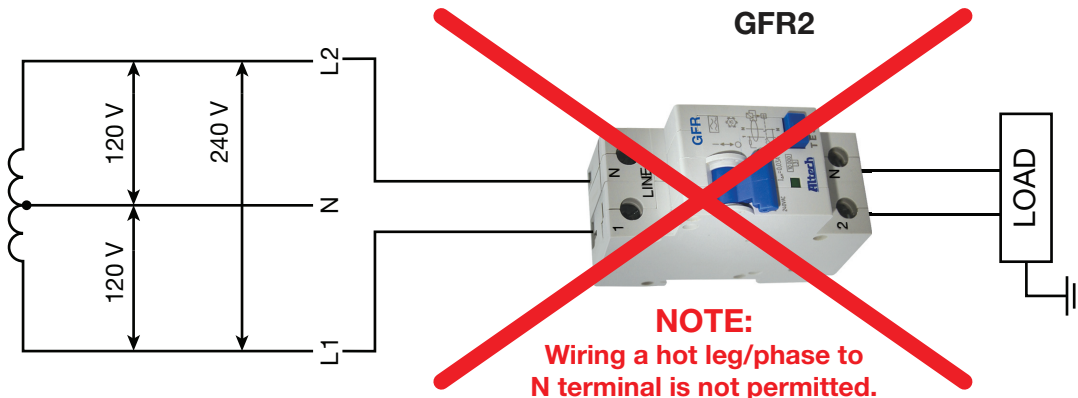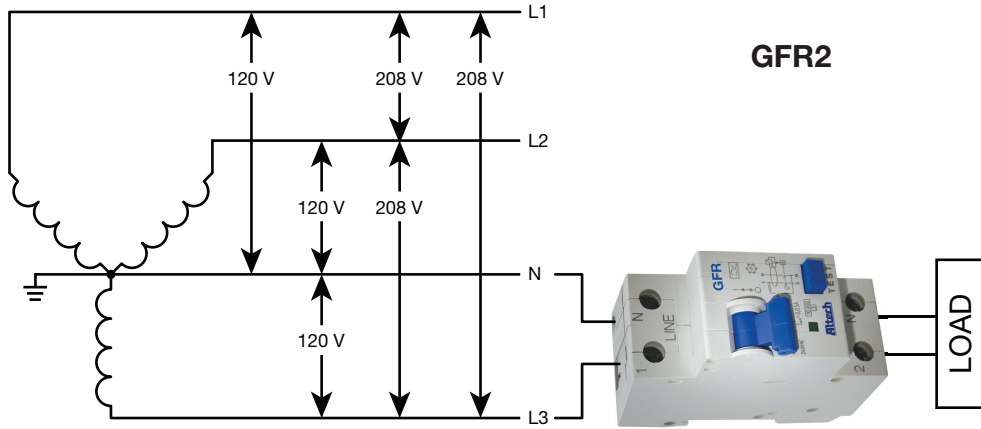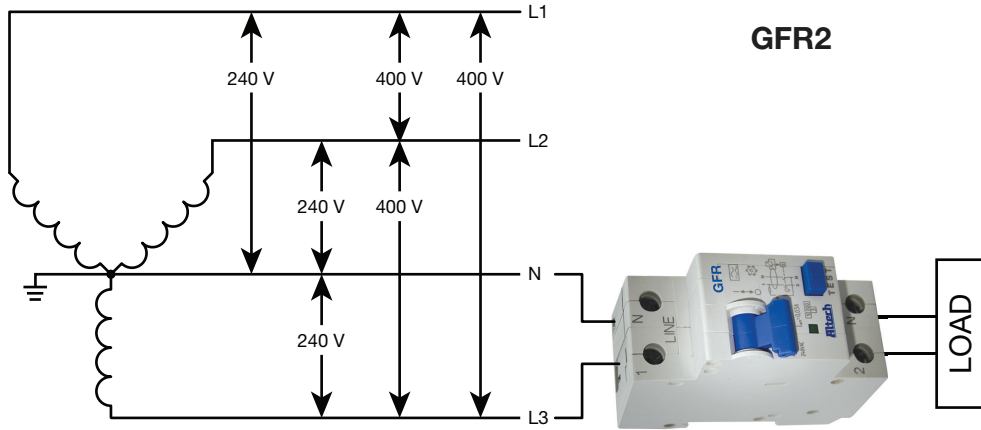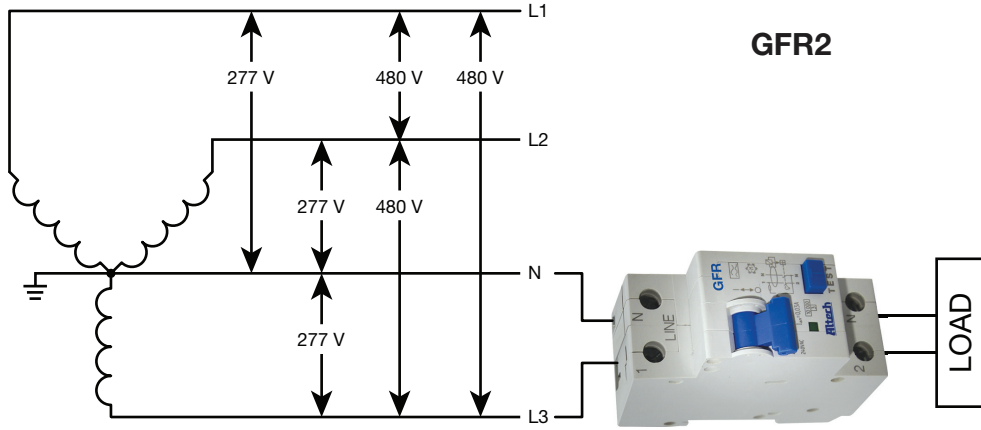

**UL 1077**  
 Ground Fault Relay  
 with Overload Protection