

FLAT BASE FEET PANEL MOUNT 300 V - WIRE PROTECTOR

HE4 Series



Dimensions & Weight

Pitch Spacing	10 mm
Weight per piece (12 pole)	31.6 g

Technical Data/Ratings

Approvals	UL ^{us} E211022	IEC 60998-2-1
Wire Size (solid / stranded)	24-10 AWG	2.5-4 mm ²
Voltage Rating	300 V	400 V
Current Rating	30 A	10 A
Torque	7.0 lb-in	0.4 Nm
Insulation Material	Polyamide 66/6 V0	
Insert Material	Tinned Brass	
Terminal Screw Material	Blue Chromated Steel	

Installation Instructions

Wire Stripping Length	6 mm
Mounting Hole Diameter	3.6 mm
Terminal Screw Size	M3

Terminal Strips

	Cat. No. <input type="checkbox"/>	Cat. No. <input checked="" type="checkbox"/>	Length	Std. Pk.
2 pole	HE4WPR/02	HE4WPR/02/BK	16.4 mm	100
3 pole	HE4WPR/03	HE4WPR/03/BK	26.4 mm	100
4 pole	HE4WPR/04	HE4WPR/04/BK	36.4 mm	100
5 pole	HE4WPR/05	HE4WPR/05/BK	46.4 mm	100
6 pole	HE4WPR/06	HE4WPR/06/BK	56.4 mm	50
7 pole	HE4WPR/07	HE4WPR/07/BK	66.4 mm	50
8 pole	HE4WPR/08	HE4WPR/08/BK	76.4 mm	50
9 pole	HE4WPR/09	HE4WPR/09/BK	86.4 mm	50
10 pole	HE4WPR/10	HE4WPR/10/BK	96.4 mm	50
11 pole	HE4WPR/11	HE4WPR/11/BK	106.4 mm	50
12 pole	HE4WPR/12	HE4WPR/12/BK	116.4 mm	50

Accessories

	Cat. No.	Std. Pk.
External Jumpers	2 pole HCL10-2	100
	3 pole HCL10-3	100
	4 pole HCL10-4	100
	12 pole HCL10-12	25

HIGHLIGHTS


FEATURES

- 300V up to 63A
- Cost effective reliable wire-to-wire solution
- Easy to use double-row terminal strips
- Panel mount or free float
- Finger safe metal parts
- Wire protector
- easy to cut to required pole configuration
- Pre cut version in stock
- Color: white/black

APPLICATIONS

- HVAC
- Appliances
- Equipment
- Power Distribution
- Junction Boxes
- Cost effective alternative to barrier strips

HE4 DIMENSIONS

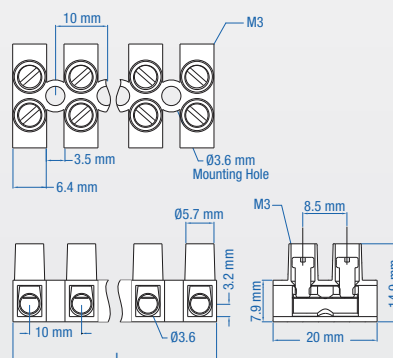

(All dimensions are shown in mm, to convert to inches please divide by 25.4)