


## HE6 Series

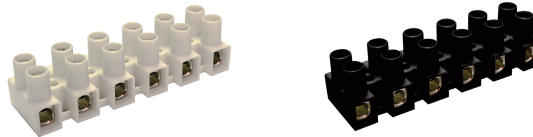

### HIGHLIGHTS

#### FEATURES

- 300V up to 63A
- Cost effective reliable wire-to-wire solution
- Easy to use double-row terminal strips
- Panel mount or free float
- Finger safe metal parts
- Wire protector
- easy to cut to required pole configuration
- Pre cut version in stock
- Color: white/black

#### APPLICATIONS

- HVAC
- Appliances
- Equipment
- Power Distribution
- Junction Boxes
- Cost effective alternative to barrier strips

#### Dimensions & Weight

Pitch Spacing	12 mm
Weight per piece (12 pole)	47.0 g

#### Technical Data/Ratings

Approvals	CE (F)	UL E211022	IEC 60998-2-1
Wire Size (solid / stranded)		20-10 AWG	4-6 mm <sup>2</sup>
Voltage Rating		300 V	400 V
Current Rating		40 A	16 A
Torque		7.0 lb-in	0.55 Nm
Insulation Material	Polyamide 66/6 V0		
Insert Material	Tinned Brass		
Terminal Screw Material	Blue Chromated Steel		

#### Installation Instructions

Wire Stripping Length	7 mm
Mounting Hole Diameter	4.2 mm
Terminal Screw Size	M3.5


#### Terminal Strips

	Cat. No. □	Cat. No. ■	Length	Std. Pk.
2 pole	HE6WPR/02	HE6WPR/02/BK	19.8 mm	100
3 pole	HE6WPR/03	HE6WPR/03/BK	31.8 mm	100
4 pole	HE6WPR/04	HE6WPR/04/BK	43.8 mm	100
5 pole	HE6WPR/05	HE6WPR/05/BK	55.8 mm	100
6 pole	HE6WPR/06	HE6WPR/06/BK	67.8 mm	50
7 pole	HE6WPR/07	HE6WPR/07/BK	79.8 mm	50
8 pole	HE6WPR/08	HE6WPR/08/BK	91.8 mm	50
9 pole	HE6WPR/09	HE6WPR/09/BK	103.8 mm	50
10 pole	HE6WPR/10	HE6WPR/10/BK	115.8 mm	25
11 pole	HE6WPR/11	HE6WPR/11/BK	127.8 mm	25
12 pole	HE6WPR/12	HE6WPR/12/BK	139.8 mm	25

#### Accessories

	Cat. No.	Std. Pk.	
External Jumpers	2 pole	HCL12-2	100
	3 pole	HCL12-3	100
	4 pole	HCL12-4	100
	12 pole	HCL12-12	25
Marking Plates	Blank	BS60E	25
	No. 1-12	BS60EM1-12	25
	No. 13-24	BS60EM13-24	25

#### HE6 DIMENSIONS

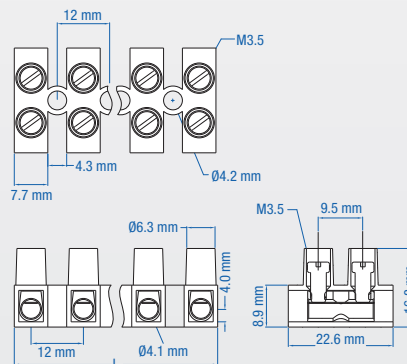

(All dimensions are shown in mm, to convert to inches please divide by 25.4)